

ISO 11901 - 3 B8 3180 220 000 004(MB)	VDI 3003 - Blatt 3 E24.54.815.G (PSA)	B2 4005 (BMW) 39D 997 (VW)	W-DX35-6204 (Ford)
--	--	-------------------------------	--------------------



OSAS + OSM

OVER STROKE
ACTIVE
SAFETY

OVER
STROKE
MARKER

ACTIVE SAFETY



OSAS



USAS



OPAS

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock



p. 247

* F_{1i} =




Isothermal
end force
at 100% Cu



p. 16


** F_{1p} =

Polytropic
end force
at 100% Cu

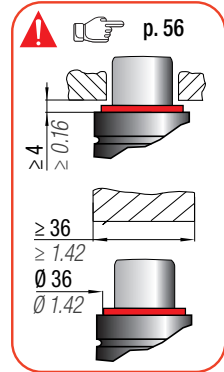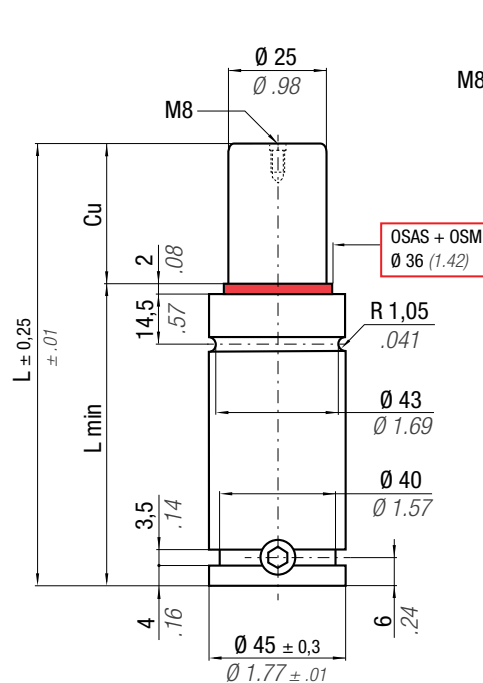

 N2		 0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 4,91 cm² 0.761 in²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s 70.8 in/s	Maintenance kit 39BMRV00750C							
CODE PHASING OUT from 04/2021	 NEW	Cu		L		L min		Fo Initial force	F1i * End force	F1p ** End force	Vo					
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	cm³	in³	~Kg	~lb	2014/68/EU
RV 750 - 010 - A	◆ RV 750 - 010 - B	10	0.39	52	2.05	42	1.65	740 1664 ± 5%	1118 2514	1343 3018	16,6 1.01	0,36 0.79	✓			
RV 750 - 013 - A	RV 750 - 013 - B	13	0.51	58	2.28	45	1.77		1152 2590	1396 3139	20,4 1.24	0,38 0.84	✓			
RV 750 - 016 - A	RV 750 - 016 - B	16	0.63	64	2.52	48	1.89		1176 2644	1435 3227	24,1 1.47	0,40 0.88	✓			
RV 750 - 019 - A	RV 750 - 019 - B	19	0.75	70	2.76	51	2.01		1194 2685	1465 3293	27,9 1.70	0,42 0.93	✓			
RV 750 - 025 - A	RV 750 - 025 - B	25	0.98	82	3.23	57	2.24		1220 2743	1507 3388	35,5 2.17	0,45 0.99	✓			
RV 750 - 032 - A	RV 750 - 032 - B	32	1.26	96	3.78	64	2.52		1240 2787	1539 3460	44,3 2.70	0,50 1.10	✓			
RV 750 - 038 - A	RV 750 - 038 - B	38	1.50	108	4.25	70	2.76	150 bar 2175psi	1251 2813	1558 3503	51,9 3.17	0,54 1.19	✓			
RV 750 - 050 - A	RV 750 - 050 - B	50	1.97	132	5.20	82	3.23	+ 20 °C +68 °F	1267 2848	1584 3562	67,0 4.09	0,61 1.34	✓			
RV 750 - 063 - A	RV 750 - 063 - B	63	2.48	158	6.22	95	3.74		1278 2873	1602 3602	83,4 5.09	0,70 1.54	✓			
RV 750 - 075 - A	RV 750 - 075 - B	75	2.95	182	7.17	107	4.21		1285 2888	1614 3628	98,5 6.01	0,78 1.72	✓			
RV 750 - 080 - A	RV 750 - 080 - B	80	3.15	192	7.56	112	4.41		1287 2893	1618 3637	104,8 6.40	0,81 1.79	✓			
RV 750 - 100 - A	RV 750 - 100 - B	100	3.94	232	9.13	132	5.20		1294 2909	1629 3663	130,1 7.94	0,94 2.07	✓			
RV 750 - 125 - A	RV 750 - 125 - B	125	4.92	282	11.10	157	6.18		1300 2922	1639 3685	161,6 9.86	1,10 2.43	✓			

◆ Disposable

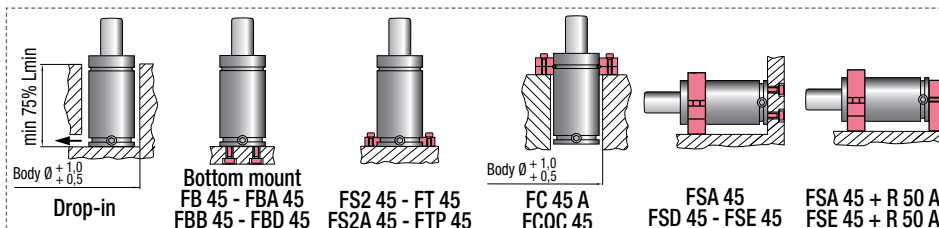

HOW TO ORDER

p. 57

INSTALLATION GUIDELINE

p. 205