

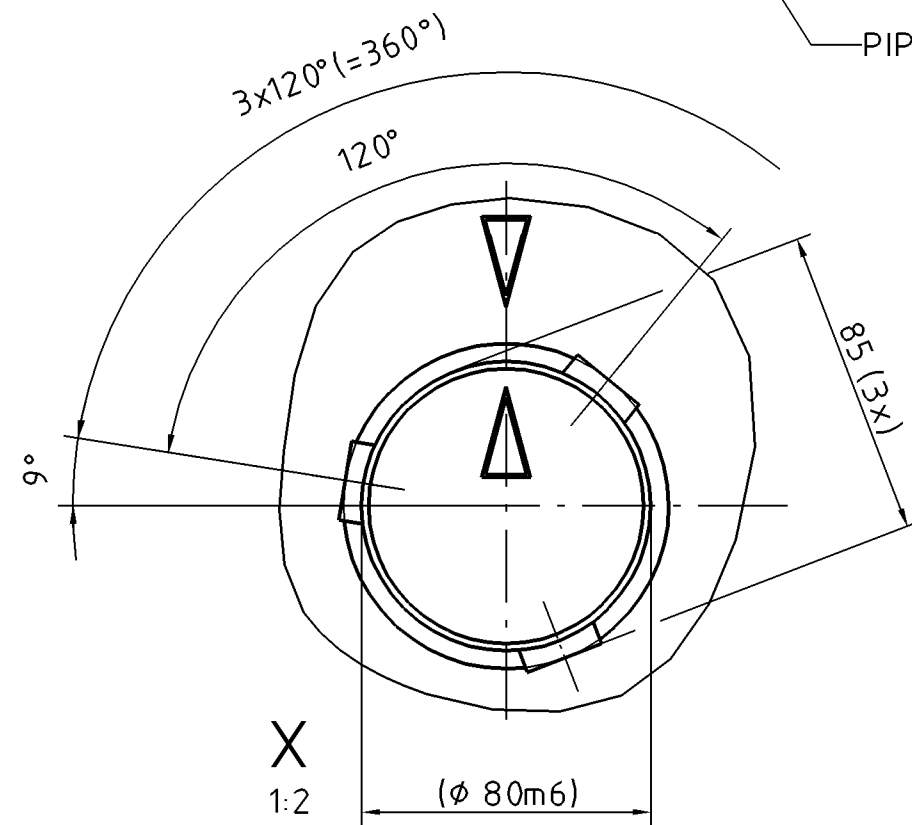
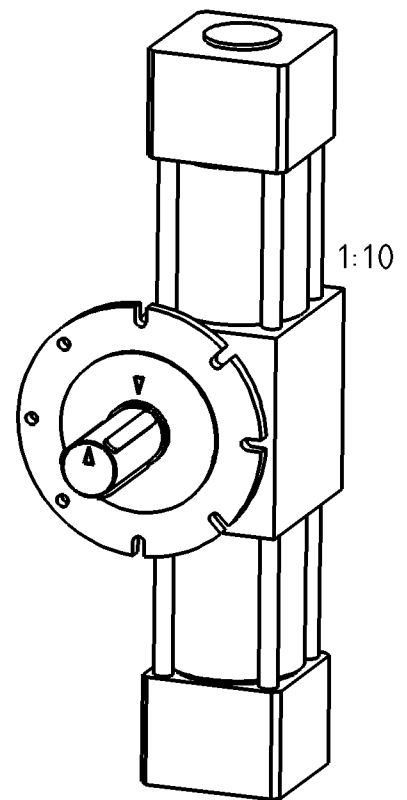
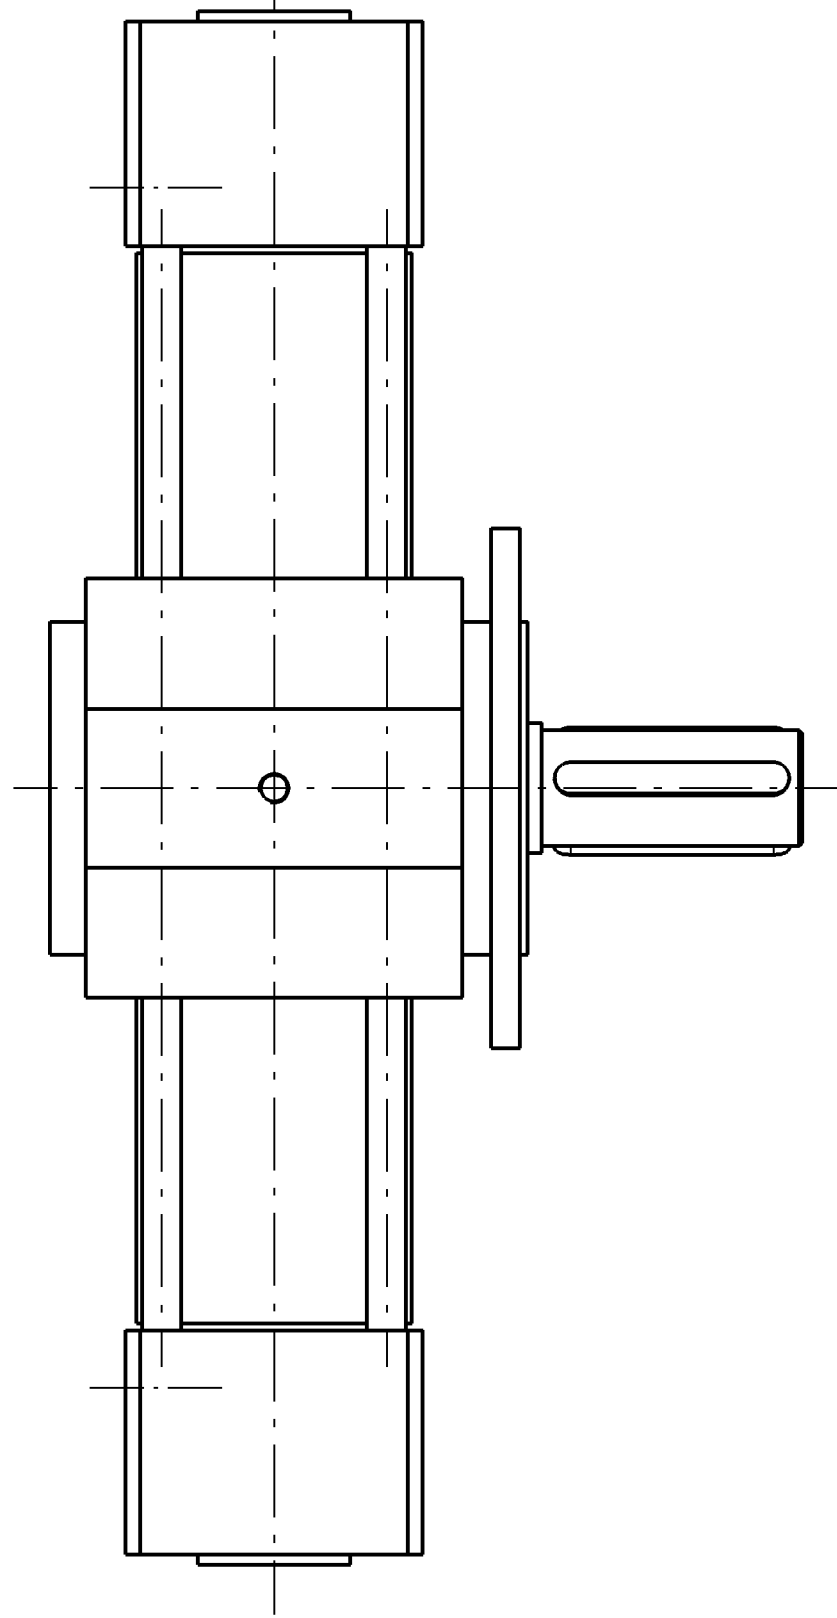


The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

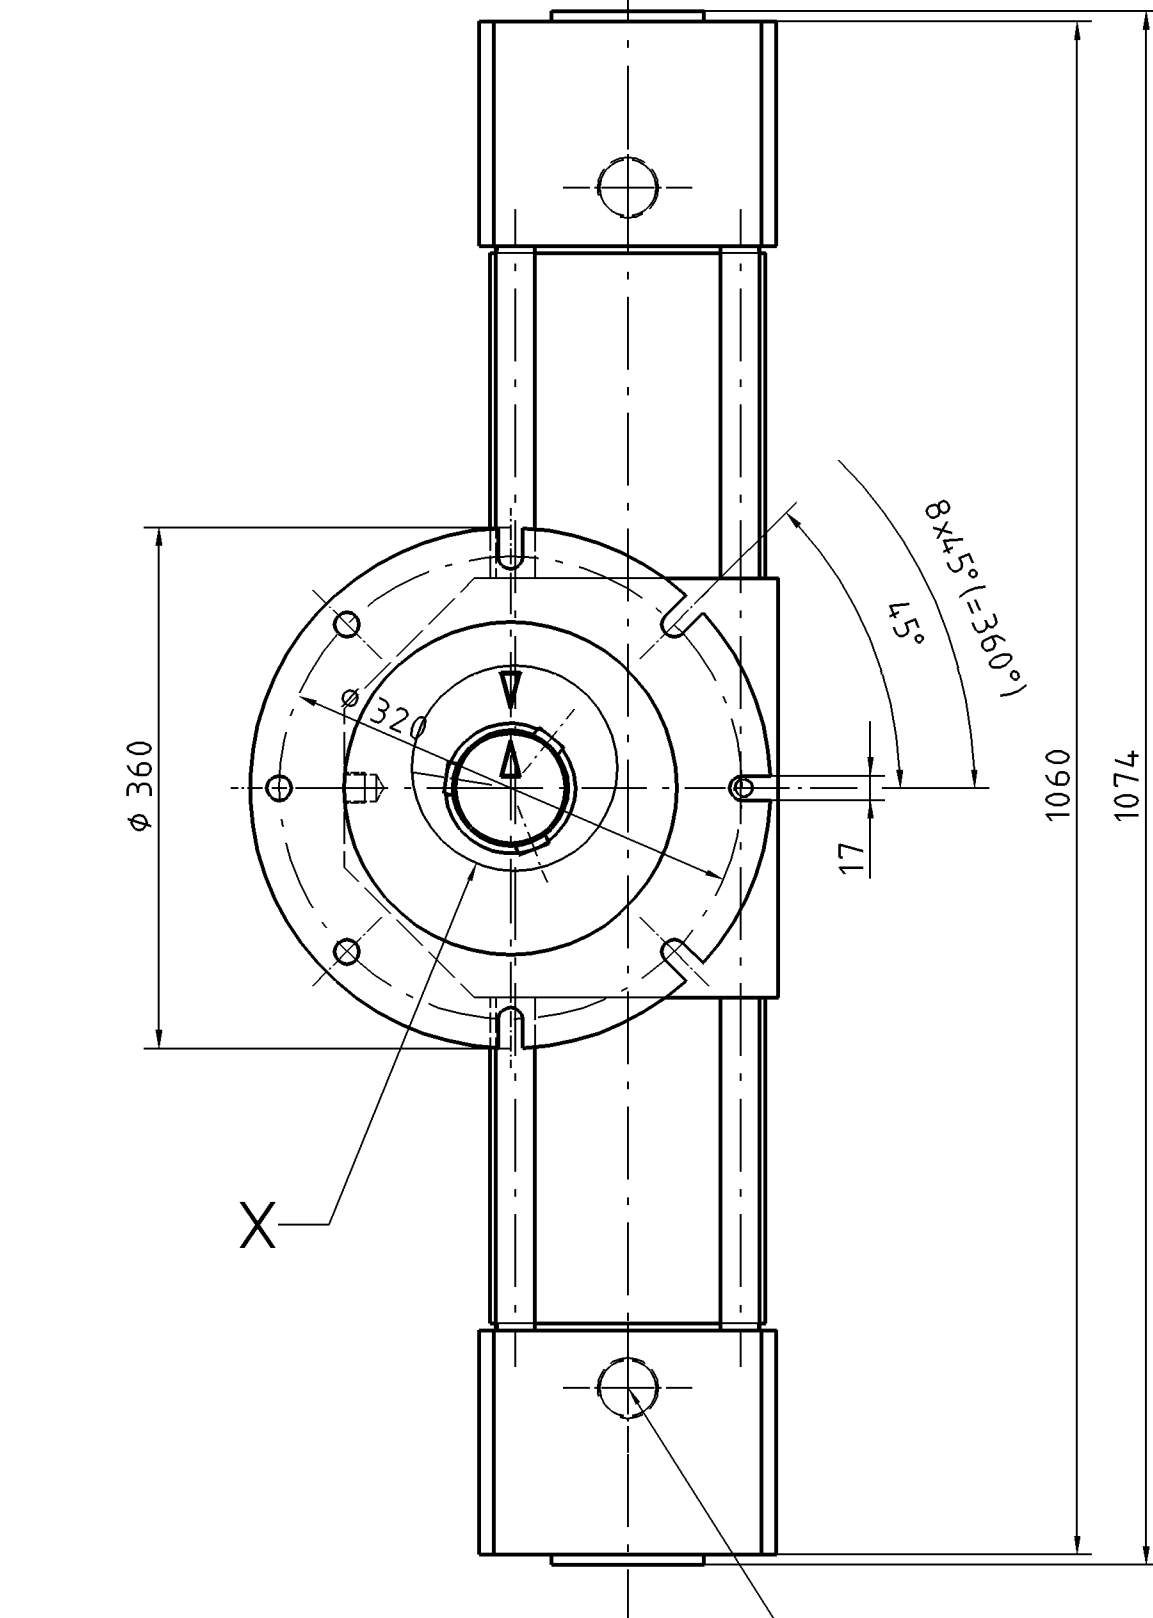

PIPE CONNECTION / Rohranschluß G1/4

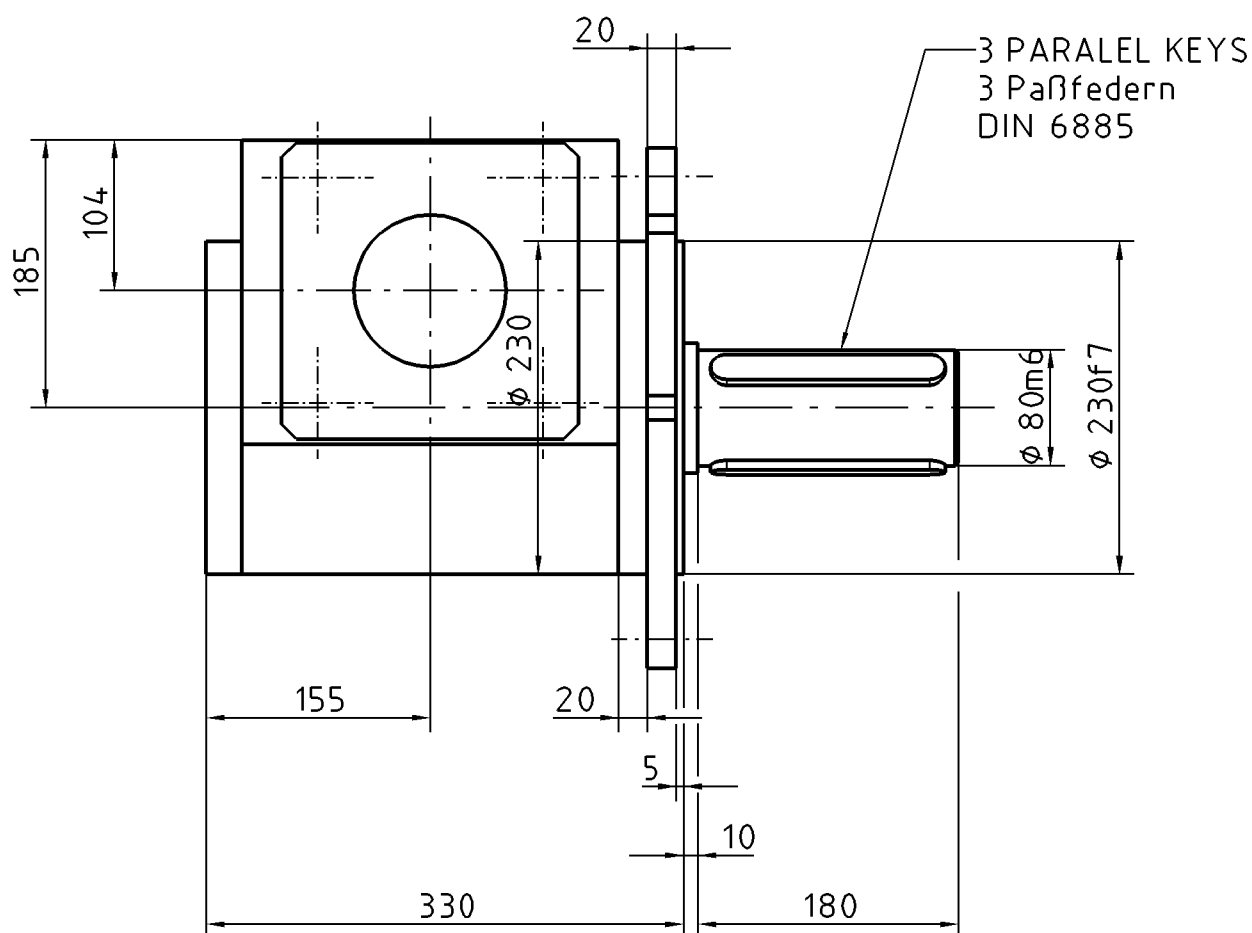

(ONLY ONE KEY REQUIRED FOR ASSEMBLY)
(Nur eine Paßfeder erforderlich für die Montage)

Paßfederlage bei Kolben in Mittelstellung
(Auslieferungszustand)
Stellung mit Gravur (Pfeile) gekennzeichnet.

KEY POSITION AT MIDPOSITION OF PISTON
(CONDITION AS SUPPLIED)
MARK POSITION WITH ENGRAVED ARROWS.

Schwenkantrieb
PIVOT DRIVE
Type: HKS- DEK-H 160 180° F, ZP, WV

A	Notiz Gravur ergänzt	NOTE ENGRAVING ADD.	KRAN	22.03.12
Index	Änderung	Modification	Name	Datum/Date
Benennung Designation			Schwenkantrieb - SWIVEL DRIVE - HKS- DEK-H 160 180° F, ZP, WV	
			SMS SIEMAG SMS group	
	Datum	Name	Masst. 1:5	Projektionsmethode 1
Gez.	21.10.11	KRAN	Scale -	ISO 128 First angle projection method
Gepr.	22.03.12	KRAN	Werkstoff, Material	Stueckgew., Unit weight
Norm	-	-	St	4 13,400 Kg
OE	ALP1	-	-	-
Tel.	4 986	Entst. aus	A?22414219	
			CAD	Blatt 1 von 1