

Execution:

II 2 G Ex db IIB o IIB+H2 T6/T5/T4/T3 Gb
II 2 G Ex tb IIIC T85°C/T100°C/T135°C/
T200°C Db
II 2 G Ex db [ia IIA o IIB o IIC Ga] IIB o
IIB+H2 T6/T5/T4/T3 Gb
II 2 D Ex tb [ia Da] IIIC T85°C/T100°C/
T135°C/T200°C Db

Applicable standards:

EN 60079-0, EN 60079-1, EN 60079-11,
EN 60079-31

Ambient temperature:

-20°C / +60°C
-50°C / +60°C

Installation area: 1 – 2 / 21 – 22

Material: Copper free aluminium die cast
Also available in AISI 316L

External coating: RAL 7000


Internal anticondesate painting on
request RAL 2004

Protection Rating: IP66

CODE	EXTERNAL DIMENSIONS			INTERNAL DIMENSIONS			EXECUTION	WEIGHT (Kg)
	A	B	C	a	b	c		
CCF10	150	150	127	93	93	94	Ex d IIB+H2	3.2
CCF11	150	200	127	93	143	95	Ex d IIB+H2	4.1
CCF12	200	250	150	140	190	116	Ex d IIB+H2	6.8
CCF13G	250	300	150	175	225	108	Ex d IIB+H2	10.6
CCF13A	250	300	200	175	225	158	Ex d IIB+H2	11.9
CCF14	250	350	150	175	275	108	Ex d IIB+H2	12.0
CCF14A	250	350	200	175	275	160	Ex d IIB+H2	13.3
CCF15	300	400	200	218	318	160	Ex d IIB+H2	18.0
CCF15A	300	400	250	218	318	211	Ex d IIB+H2	20.0
CCF16	300	450	200	218	368	162	Ex d IIB+H2	20.0
CCF16A	300	450	250	218	368	212	Ex d IIB+H2	22.5
CCF17	400	500	200	305	405	146	Ex d IIB+H2	31.0
CCF17A	400	500	250	305	405	197	Ex d IIB+H2	34.0
CCF18	350	550	200	255	455	148	Ex d IIB+H2	31.0
CCF18A	350	550	250	255	455	200	Ex d IIB+H2	34.0
CCF19	400	600	200	300	500	143	Ex d IIB+H2	38.0
CCF19A	400	600	250	300	500	193	Ex d IIB+H2	43.0
CCF110	450	650	200	356	548	143	Ex d IIB+H2	49.0
CCF110A	450	650	250	356	548	190	Ex d IIB+H2	55.0
CCF10B	450	650	300	356	548	243	Ex d IIB+H2	61.5
CCF111	500	700	250	386	586	181	Ex d IIB+H2	68.0
CCF111A	500	700	300	386	586	229	Ex d IIB+H2	76.0
CCF111B	500	700	350	386	586	277	Ex d IIB+H2	84.0
CCF112	550	750	250	436	636	176	Ex d IIB+H2	82.0
CCF112A	550	750	300	436	636	224	Ex d IIB+H2	90.0
CCF112B	550	750	350	436	636	276	Ex d IIB+H2	98.0
CCF113	200	600	140	120	520	104	Ex d IIB+H2	15.5
CCF114	220	750	175	140	670	125	Ex d IIB+H2	24.0
CCF116	670	920	330	550	800	245	Ex d IIB	134.0
CCF116A	670	920	390	550	800	303	Ex d IIB	145.0
CCF116B	670	920	450	550	800	362	Ex d IIB	162.0
CCF120B	450	450	470	356	356	398	Ex d IIB	51.0

Note:
Available threads: · NTP ANSI B1.20.1 · ISO Metric..x1,5 ISO 956
Side legend: · L= Long side · C= Short side
This table is indicative only. The quantity of the entrances / cable glands are valid only after Technical Office approval.
Other entrance possibilities are available on request.



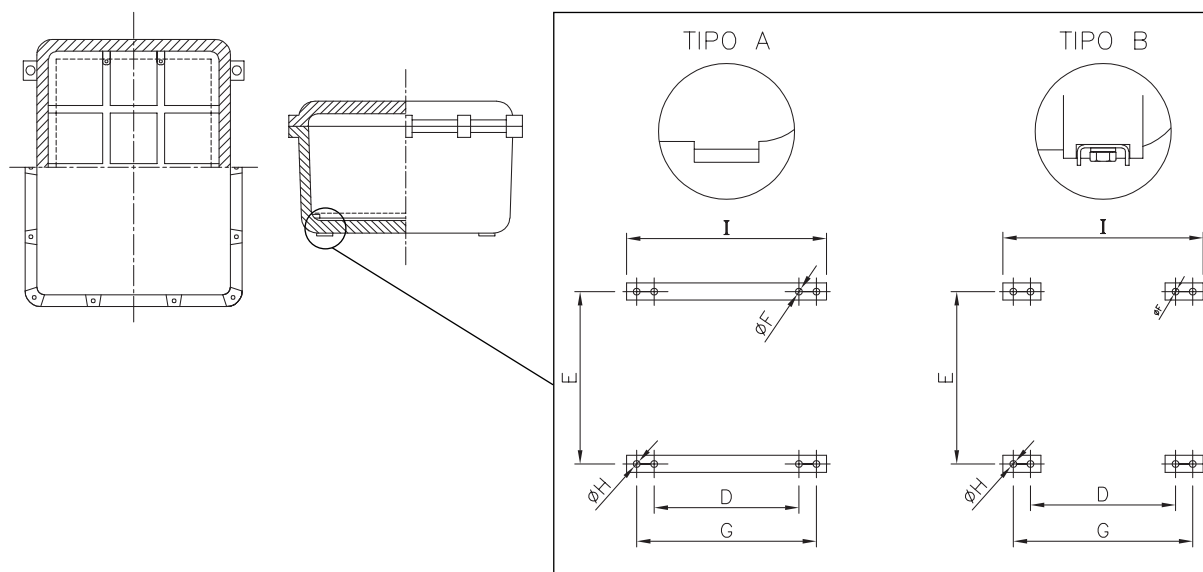

TYPE(*)	INSTALLATION TEMPLATES (mm)					
	D	E	F	G	H	I
A	104	60	M6	140	7	160
A	104	110	M6	140	7	160
A	154	160	M6	190	7	210
A	185	180	M6	230	9	255
A	185	180	M6	230	9	255
A	185	230	M6	230	9	255
A	185	230	M6	230	9	255
A	225	275	M8	275	9	300
A	225	275	M8	275	9	300
A	225	325	M8	275	9	300
A	225	325	M8	275	9	300
B	315	350	M8	370	9	400
B	315	350	M8	370	9	400
A	265	400	M10	320	11	350
A	265	400	M10	320	11	350
A	315	450	M10	370	11	400
A	315	450	M10	370	11	400
B	360	500	M10	420	11	450
B	360	500	M10	420	11	450
B	360	500	M10	420	11	450
B	395	520	M12	465	13	500
B	395	520	M12	465	13	500
B	395	520	M12	465	13	500
B	445	570	M12	515	13	550
B	445	570	M12	515	13	550
B	445	570	M12	515	13	550
A	135	470	M6	180	9	205
A	150	610	M8	200	9	225
A	560	650	M14	660	16	700
A	560	650	M14	660	16	700
A	560	650	M14	660	16	700
A	360	300	M10	420	11	450