

TEMCO® ULR DEFLECTION ROLLERS. PRODUCT OVERVIEW.


—

FEBRUARY 2016



Temco® ULR – Deflection Rollers

Deflection Roller figure

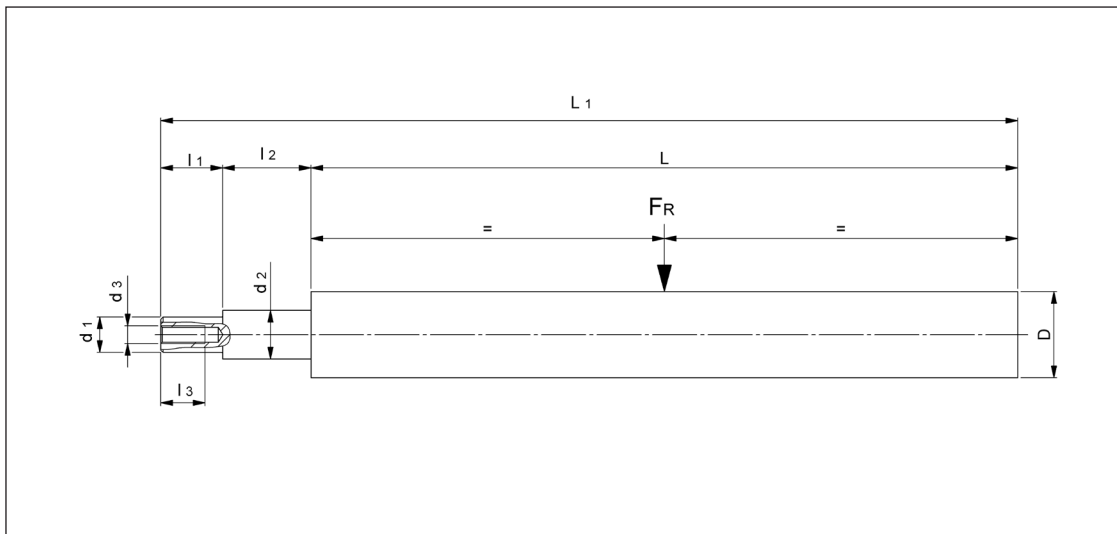

Overview

Type	Shell		Material	Coat	Adaptor						Material	L ₁ [mm]	v _{max} [m/min]
	D [mm]	L [mm]			d ₁ [mm]	l ₁ [mm]	d ₂ [mm]	l ₂ [mm]	d ₃ [mm]	l ₃ [mm]			
ULR34250	34	250	CFRP		Ø18.0	45.0	Ø21.0	-1.5	M8	20.0	St.	293.5	427
ULR34250-01	34	250	CFRP	XP 0198	Ø18.0	45.0	Ø21.0	-1.5	M8	20.0	St.	293.5	427
ULR34250-06**	34	250	CFRP				Ø29.6	25.0	M8	20.0	Alu	275.0	750
ULR34250-07**	34	250	CFRP		M12	15.0	SW24	125.0			St.	390.0	750
ULR34250-08**	34	250	CFRP	XP 0198			Ø29.6	25.0	M8	20.0	Alu	275.0	750
ULR34250-09**	34	250	CFRP	XP 0198	M12	15.0	SW24	125.0			St.	390.0	750
ULR34250-10**	34	250	CFRP		Ø18.0	45.0	Ø21.0	-1.5	M8	20.0	Alu	293.5	750
ULR34250-11**	34	250	CFRP	XP 0198	Ø18.0	45.0	Ø21.0	-1.5	M8	20.0	Alu	293.5	750
ULR34250-15	34	250	CFRP		Ø18.0	75.0	Ø21.0	-1.5	M8	20.0	Alu	323.5	750
ULR34400-02**	34	400	CFRP		Ø18.0	45.0	Ø29.6	-1.5	M8	20.0	Alu	443.5	600
ULR36200-E-00	36	200	ALU	anodized								200.0	400
ULR36400-E-00	36	400	ALU	anodized								400.0	400
ULR39130-E-01	39	130	ALU	hard-anodized	Ø16.0	28.0	Ø22.0	135.0	M8	20.0	St.	293.0	400
ULR39220-E-01	39	220	ALU	hard-anodized	Ø16.0	28.0	Ø22.0	81.0	M8	20.0	St.	329.0	400
ULR39220-E-02	39	220	ALU	hard-anodized	Ø16.0	28.0	Ø22.0	90.0	M8	20.0	St.	338.0	400
ULR39220-E-03	39	220	ALU	hard-anodized	Ø25.0	85.0					St.	305.0	400
ULR39320-E-01	39	320	ALU	hard-anodized	Ø16.0	28.0	Ø22.0	31.0	M8	20.0	St.	379.0	400
ULR39320-E-02	39	320	ALU	hard-anodized	Ø16.0	28.0	Ø22.0	40.0	M8	20.0	St.	388.0	400
ULR39320-E-03	39	320	ALU	hard-anodized	Ø25.0	35.0					St.	355.0	400
ULR44250-02**	44	250	CFRP		Ø18.0	45.0	Ø21.0	23.5			St.	318.5	550
ULR44250-03	44	250	CFRP	XP 0198	Ø18.0	45.0	Ø21.0	23.5			St.	318.5	550
ULR44250-04	44	250	CFRP		M12	15.0	SW24	125.0			St.	390.0	553
ULR44400-01**	44	400	CFRP		Ø18.0	45.0	Ø21.7	-1.5	M8	20.0	St.	443.5	550
ULR44400-02**	44	400	CFRP	XP 0198	Ø18.0	45.0	Ø21.7	-1.5	M8	20.0	St.	443.5	550
ULR44400-05	44	400	CFRP		Ø18.0	45.0	Ø29.6	-1.5	M8	20.0	Alu	443.5	650
ULR44400-06	44	400	CFRP	XP 0198	Ø18.0	45.0	Ø29.6	-1.5	M8	20.0	Alu	443.5	650
ULR60320-00	60	320	CFRP		54.5	22.0			M12	22.0	Alu	342.0	700
ULR60440-01	60	440	CFRP	XP 0198	Ø29.0	85.0					Alu anodized	540.0	700
ULR60440-02	60	440	ALU	hard-anodized	Ø25.0	15.0	Ø35	120	M12	24.0	V2A	570.0	450
ULR60440-03	60	440	ALU	XP 0198	Ø25.0	15.0	Ø35	120	M12	24.0	V2A	570.0	450
ULR60440-04	60	440	ALU	hard-anodized	Ø29.0	85.0					Alu anodized	540.0	450

** = Standard

Saurer Components GmbH, Zweigniederlassung Hammelburg

Fuldaer Str. 19, 97762 Hammelburg, Germany

T +49 9732 87 0, F +49 9732 87 310

sales.temco@saurer.com, www.saurer.com