

M-5000TG Low Flow Wall-Mounted Series

M-5000TG Bronze Wall-Mounted LOW FLOW Series

Get the same quality and performance of our standard M-5000TG, plus benefit from reduced water consumption!

This unit produces hot water instantly from a steady supply of steam and cold water. All mixing units-hose stations in the **M-5000TG Low Flow Series** are equipped with a dial-type gauge that indicates the wash water's exact temperature. Users can easily regulate the temperature by turning the unit's steam and cold water valves. As an added safety measure, these units shut off their steam source automatically if the cold water supply falls below 40 psi for any reason. This prevents hazardous steam from exiting the unit and causing steam burns.

Our Temperature Indicating (TG) model (**M-5000TG Low Flow**) is equipped with a dial-type gauge that accurately indicates the wash water's temperature. It also features a specially designed integral blending chamber to thoroughly blend steam and cold water.



Shown: Bronze M-5000TG Low flow


Please review the chart below before purchasing an M-5000TG Low Flow unit.

REQUIRED STEAM MODEL NUMBER	REQUIRED STEAM PRESSURE*	REQUIRED WATER PRESSURE*	GPM
M-5000 Low Flow	40-150 lbs.	40-80 lbs.	3¼-6

The M-5000 Low Flow unit is available in bronze.

Specifications


- ◆ Maximum water temperature: 200°F/93°C
- ◆ Maximum working pressure: 150 psi steam

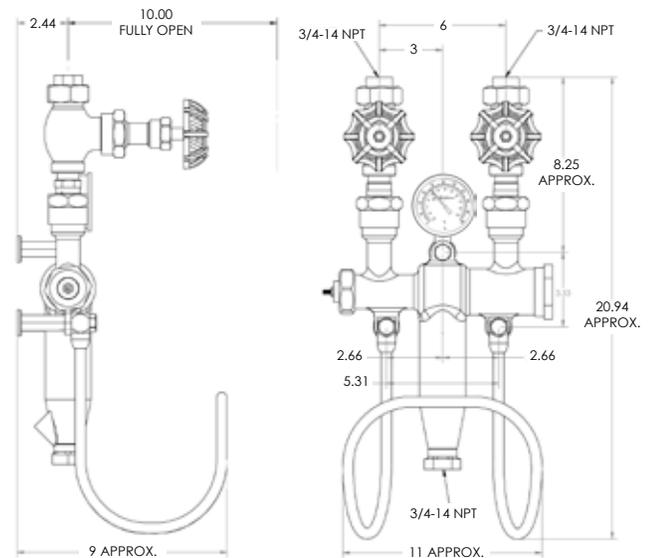

ISO 9001
QMI-SAI Global

Last Updated: July, 2012

M-5000TG Low Flow Wall-Mounted Series

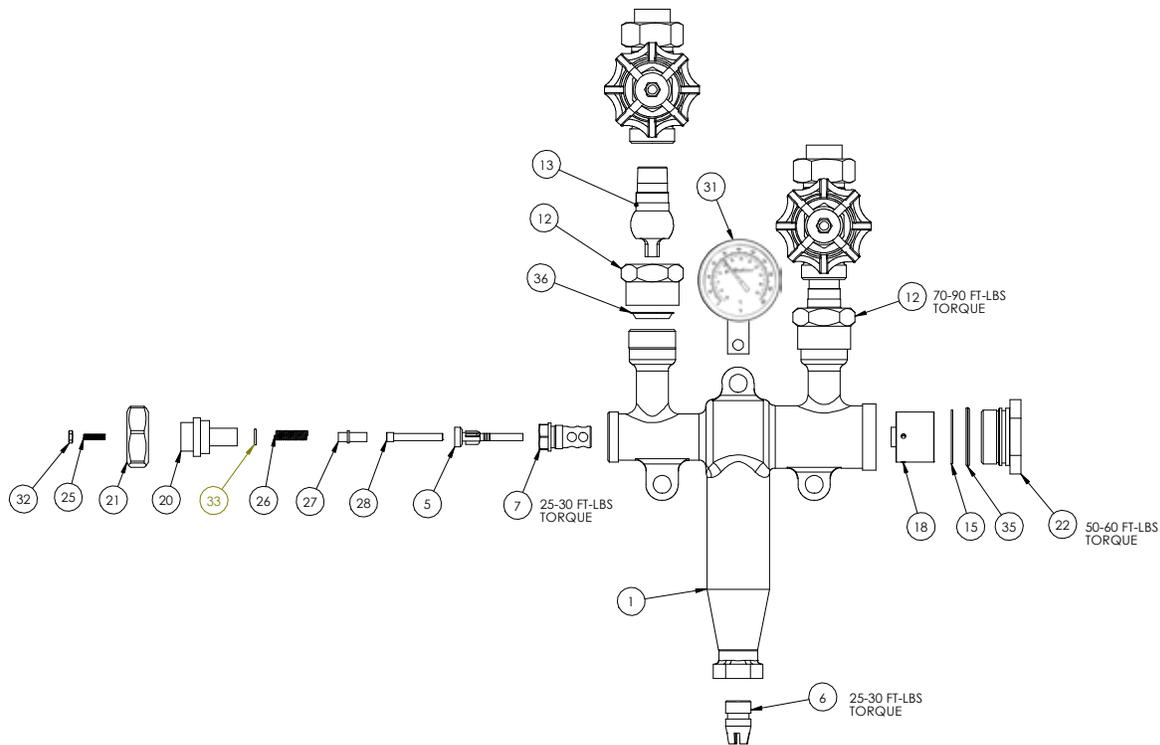

PARTS					
PART NO.	PART	M-5000 Low Flow MATERIAL	PART NO.	PART	M-5000 Low Flow MATERIAL
1	BODY with integral water chamber housing and blending section (includes parts 6 and 7)	BRONZE	18	WATER CHAMBER	STAINLESS STEEL
2	HOSE RACK CAP SCREW (not shown)	STAINLESS STEEL	20	POPPET GUIDE	BRASS
3	HOSE RACK LOCK WASHER (not shown)	STAINLESS STEEL	21	POPPET GUIDE NUT	BRASS
4	HOSE RACK CONNECTOR (not shown)	BRASS	22	BODY NUT	BRONZE
5	STEAM POPPET	STAINLESS STEEL	25	POPPET STOP	STAINLESS STEEL
6	STEAM JET	STAINLESS STEEL	26	GUIDE HOUSING	STAINLESS STEEL
7	POPPET SEAT	BRONZE	27	GUIDE EXTENSION	STAINLESS STEEL
8	HOSE RACK (not shown)	STAINLESS STEEL	28	PUSHER	STAINLESS STEEL
10	SPACER (not shown)	STAINLESS STEEL	31**	TEMP GAUGE	STAINLESS STEEL
11	WALL PLATE (not shown)	BRASS	32	LOCK NUT	STAINLESS STEEL
12	BALL CHECK UNION NUT	BRASS	33	O-RING POPPET STOP	EPDM
13 [†]	BALL CHECK VALVES (includes part 36)	BRASS/STAINLESS STEEL ALUMINUM SILICONE BRONZE	35	"O" SEALING RING FOR WATER CHAMBER HOUSING	EPDM
15	SNAP RING	STAINLESS STEEL	36	BALL CHECK GASKET	COPPER

[†]Sold as a complete unit.

**Temperature gauge: 40-120°C/100-250°F.