


# Product Data



## Dimensions

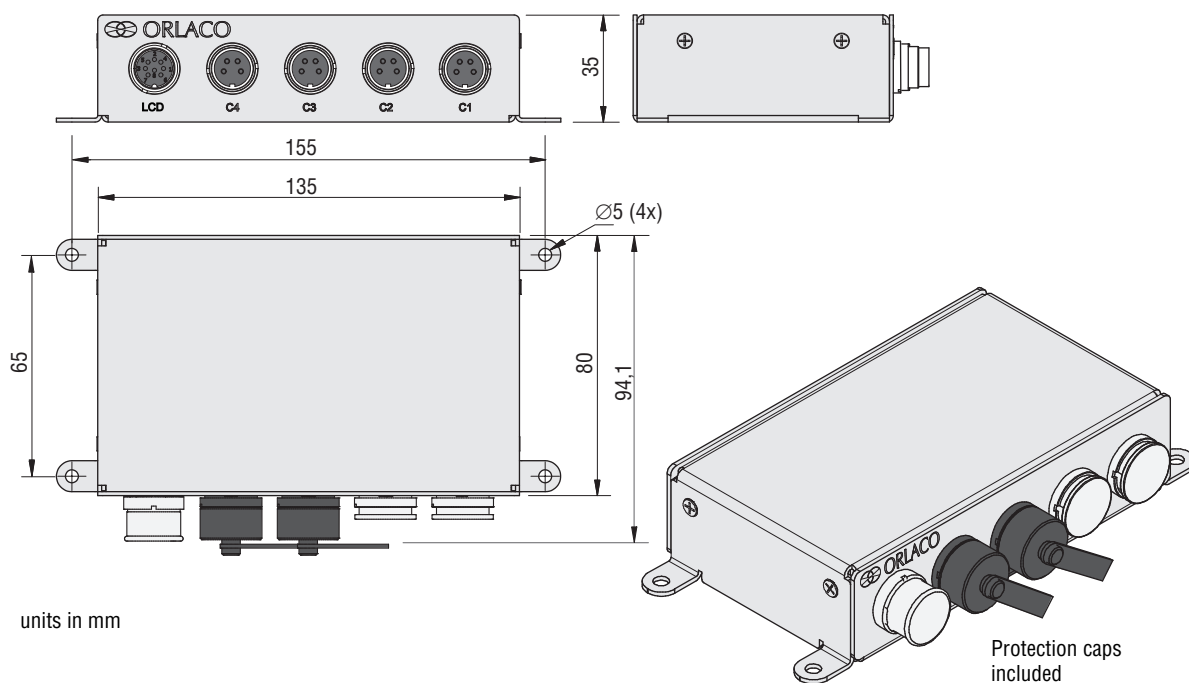

# TECHNICAL DATA

## Multiview box II

**Article number**  
**Description**

**Description**  
**0405100**

MultiView box is a video system for up to 4 cameras, PAL or NTSC. There are many possibilities of different split views in 5 selectable video channels. Advanced video viewing image for various camera-system configurations.

**Software menu**  
**Special features**

On Screen Display (OSD) functionality for all settings.

Customizing views, customizing channels, (multi) markers, boundary settings and camera text labeling.

**Housing**

Stainless steel AISI 316. The housing is isolated from the internal electronic parts.

**Power input**

12/24VDC, power supplied by Orlaco monitor.

**Camera input**

C1-C4: 4x Camera input (4pin connector).

**Monitor output**

1x 7pin connector (serial) monitor output.

**Protection**

IP67 according to IEC 60529.

**Weight**

0,86kg, 1kg in standard packing.

**Operating temperature**

-40°C to +85°C.

**NB**

Cameras and monitors are not included.

**Documentation**

User manual; UM0972191




**Green Passport**

All materials are compliant to Green Passport requirements according IMO resolution MEPC.197(62) as adopted on 15 July 2011 (Maritime sector: International Maritime Organization concerning the functions of the Marine Environment Protection Committee).


**NOTE:**

**Use only PAL or NTSC cameras. You can not connect both PAL and NTSC cameras in one system together.**

### Electrical connections

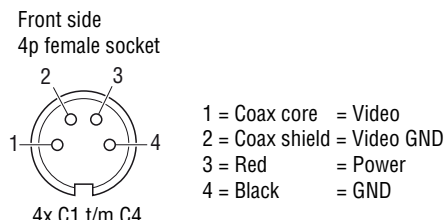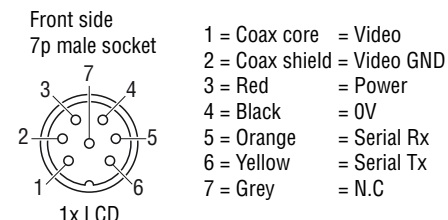

### System overview example

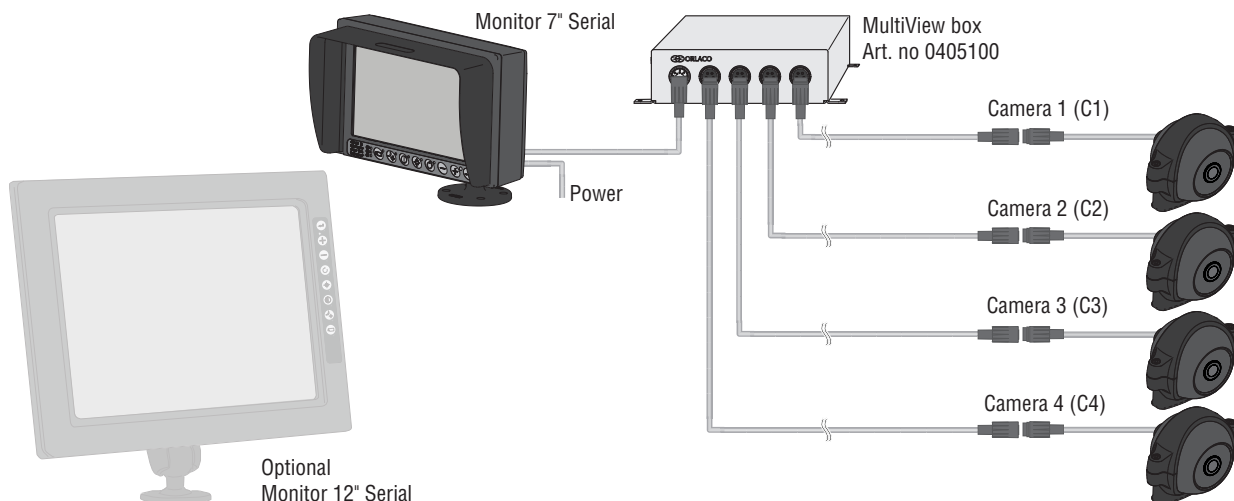

All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.

All products are manufactured in accordance with the ISO 9001 quality management system, IATF 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

