


Übersicht

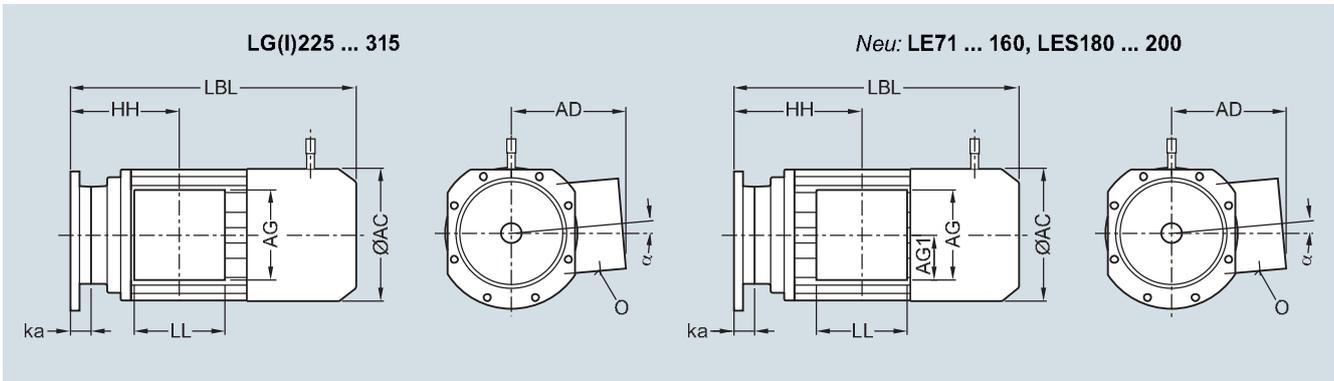

Motor	Getriebetyp					Maße			Getriebe- typ	Maße			AC	α	Anschlusskasten					
	E.	Z.	K.	C.	F.	ka	HH	LBL		D	ka	HH			LBL	AC	α	Typ	AD	LL
LE132ZM <i>LA132ZM</i>	48	48	68	68	68B	0,5	- ²⁾	- ²⁾					264 259	0	TB1H10	207 195	162 140	162 140	81	2xM32x1,5 (3/4"+1/2") (1"+3/4")
	68	68	88	88	88B	54,5	298,5 294,5	598,5 596	88	64	308 260,5	608 605,5								
	88	88	108		108B	36	280 276	580 577,5	108	56	300 296	600 597,5								
	108	108	128		128B	23,5	267,5 263,5	567,5 565	128	47	291 287	591 588,5								
	128	128	148		148B	13	257 253	557 554,5	148	43	287 283	587 584,5								
	148	148	168		168B	5	249 245	549 546,5	168	31,5	275,5 271,5	575,5 573								
		168	188		188B	-9,5	- ²⁾	- ²⁾	188	-9,5	- ²⁾	- ²⁾								
					208	-9,5	- ²⁾	- ²⁾												
LE160M <i>LA160M</i>	68	68	88	88	88B	0,5	- ²⁾	- ²⁾					318 313,5	0	TB1J10	241 227	180 165	180 165	90	2xM40x1,5 (1 1/4"+1/2") (1"+3/4")
	88	88	108		108B	25,5	265,5 195,5	625,5 652,5												
	108	108	128		128B	14	254 184	614 641	108	43,5	283,5 213,5	643,5 670,5								
	128	128	148		148B	-2,5	237,5 167,5	597,5 624,5	128	34,5	274,5 204,5	634,5 661,5								
	148	148	168		168B	-10	230 160	590 617	148	28	268 198	628 655								
		168	188		188B	-24,5	- ²⁾	- ²⁾	168	16,5	256,5 186,5	616,5 643,5								
		188			208	-24,5	- ²⁾	- ²⁾	188	-24,5	- ²⁾	- ²⁾								
							145,5	602,5			145,5	602,5								
LE160L <i>LA160L</i>	68	68	88	88	88B	0,5	- ²⁾	- ²⁾					318 313,5	0	TB1J10	241 227	180 165	180 165	90	2xM40x1,5 (1 1/4"+1/2") (1"+3/4")
	88	88	108		108B	25,5	265,5 195,5	625,5 652,5												
	108	108	128		128B	14	254 184	614 641	108	43,5	283,5 213,5	643,5 670,5								
	128	128	148		148B	-2,5	237,5 167,5	597,5 624,5	128	34,5	274,5 204,5	634,5 661,5								
	148	148	168		168B	-10	230 160	590 617	148	28	268 198	628 655								
		168	188		188B	-24,5	- ²⁾	- ²⁾	168	16,5	256,5 186,5	616,5 643,5								
		188			208	-24,5	- ²⁾	- ²⁾	188	-24,5	- ²⁾	- ²⁾								
							145,5	602,5			145,5	602,5								

1) Werte in Klammer gelten für die NPT Verschraubung.

2) Kombination nicht mehr verfügbar.

Die grauen Werte sind die Maße der LA Motoren und dienen nur zur Orientierung.

Die roten Werte zeigen eine Verlängerung gegenüber den LA-Motoren.

Die grünen Werte zeigen eine Verkürzung gegenüber den LA-Motoren.